



**RIKUTEC ULTRA  
CLEAN PACKAGING**

# PRECISION PACKAGING FOR THE PUREST APPLICATION

## RIKUTEC ULTRA CLEAN PACKAGING – HIGH PURITY SOLUTIONS MADE IN GERMANY

RIKUTEC is an innovative, globally active family-owned company based in Altenkirchen, Germany. For more than 25 years, we have been developing and manufacturing ultra clean packaging solutions made from multi-layer HDPE – engineered for the world’s most demanding industries.

With our proprietary COEX Accumulator Head Technology, we produce 2–5 layer containers that combine maximum purity with engineering precision and process safety – 100% Made in Germany.

## OUR MISSION

Packaging without compromise  
– for industries where purity is  
non-negotiable.

## OUR VALUES:

Innovation. Quality.  
Reliability. Partnership



**RIKUTEC®** | **ULTRA CLEAN  
PACKAGING**  
RIKUTEC Group  
HIGH PURITY. HIGH PERFORMANCE.






# TRUSTED BY THE SEMICONDUCTOR INDUSTRY

## PURITY IS NOT OPTIONAL – IT'S ESSENTIAL

In the semiconductor industry, every nanogram matters. Ultra-pure chemicals are critical in all process steps. From wafer cleaning and etching to advanced lithography. Even the smallest contamination can result in costly production losses, rejected wafers, or reduced chip performance.

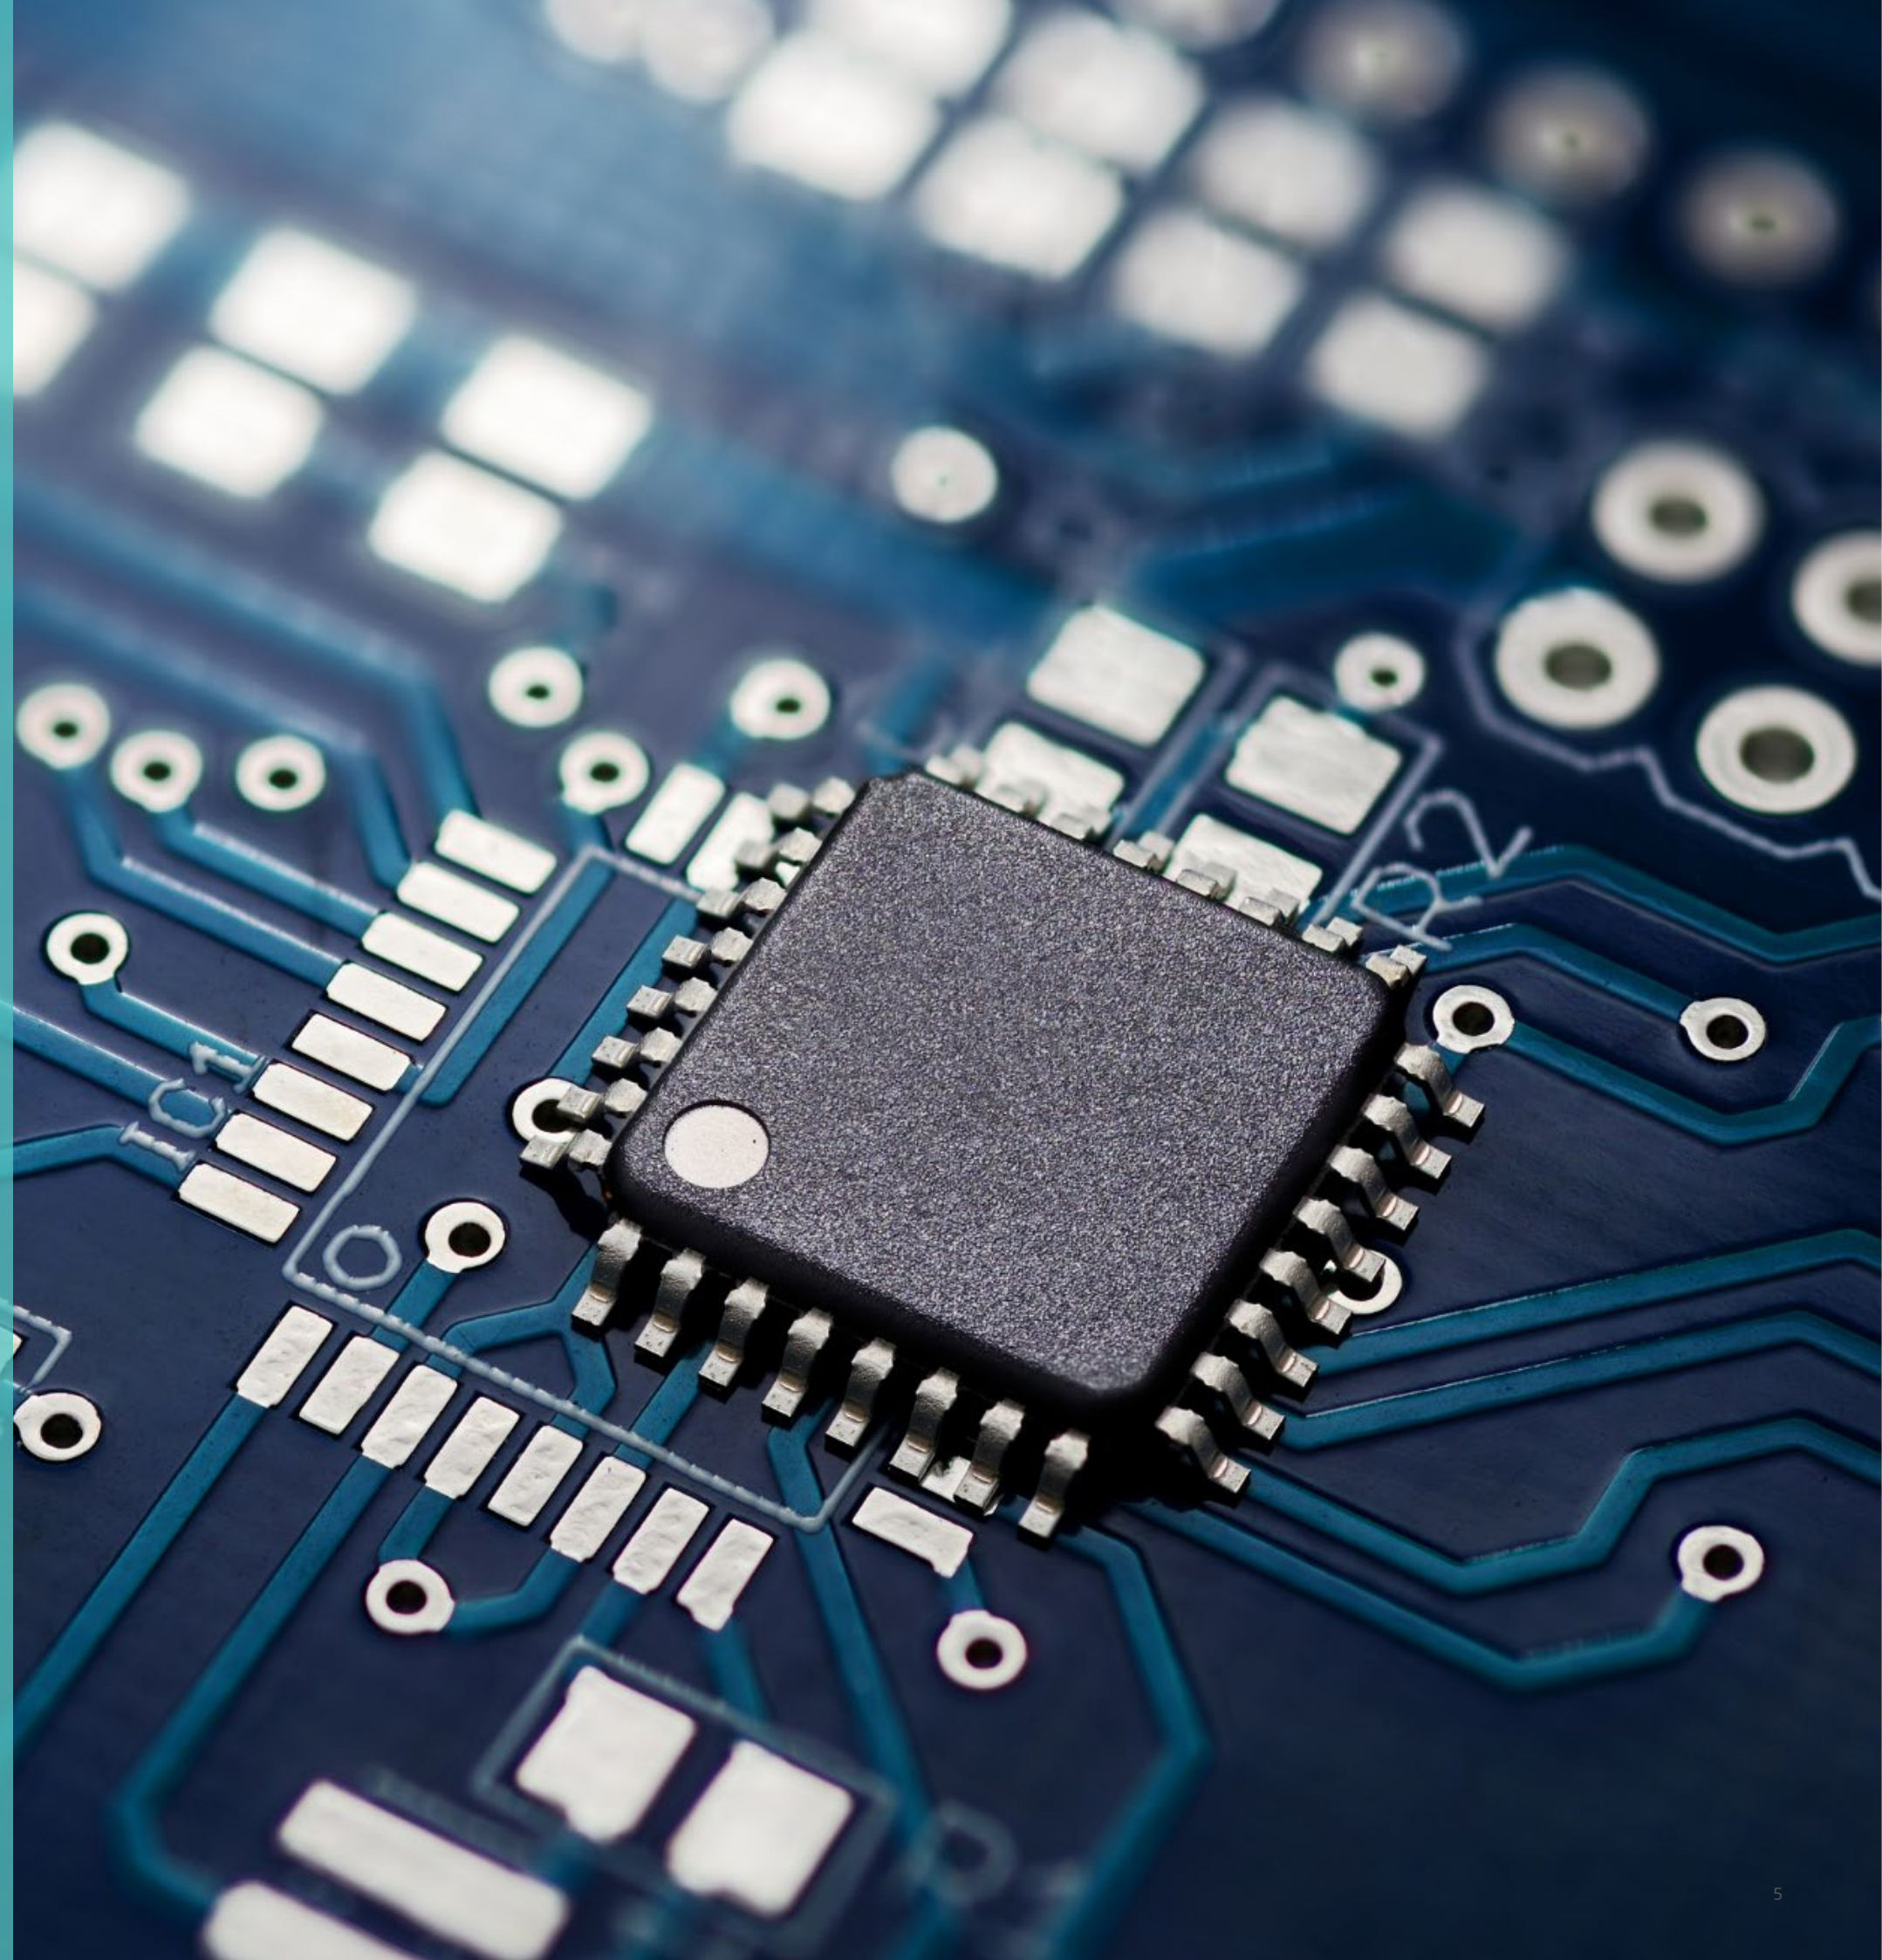



# RIKUTEC ULTRA CLEAN PACKAGING

More than just packaging. It's a critical building block for process safety and product integrity. It safeguards what matters. Trusted by industry leaders worldwide to ensure purity, performance, and protection.



## RIKUTEC INTEGRATED SYSTEM SOLUTIONS

IBCs and drums. Ultra-clean and smart accessories. Expert installation and support. All from one trusted partner.



### ULTRA CLEAN INTERMEDIATE BULK CONTAINERS



### ULTRA CLEAN DRUMS



### HIGH-PURITY ACCESSORIES:

Dip tubes, dispense heads, quick connection systems

## IN-HOUSE EXPERTISE MEETS ULTRA CLEAN STANDARDS

Our drums and IBCs are fully developed in-house, manufactured on proprietary equipment, and entirely made in Germany, combining decades of experience with engineering precision. All packaging is produced using state-of-the-art systems and specialized filtration technologies to prevent contamination throughout the production process.

## GLOBALLY TRUSTED, GERMAN ENGINEERED

With 100% production in Germany and technical expertise, service and support across the USA and Asia, RIKUTEC is your trusted partner for ultra-clean packaging.


RIKUTEC ULTRA CLEAN  
PACKAGING

POLY IBCs

RIKUTEC Poly IBCs are premium multiway containers designed for the safe handling of high-purity liquids in the semiconductor, chemical, pharmaceutical.

Thanks to our patented multi-layer blow molding technology and the selective use of 100% high-purity, additive-free HDPE in all components that come into direct contact with the medium, our IBCs offer comprehensive protection against external contamination and trace materials – ensuring maximum material integrity where it matters most.

MAXIMUM SAFETY WITH  
RIKUTEC-SOLUTIONS

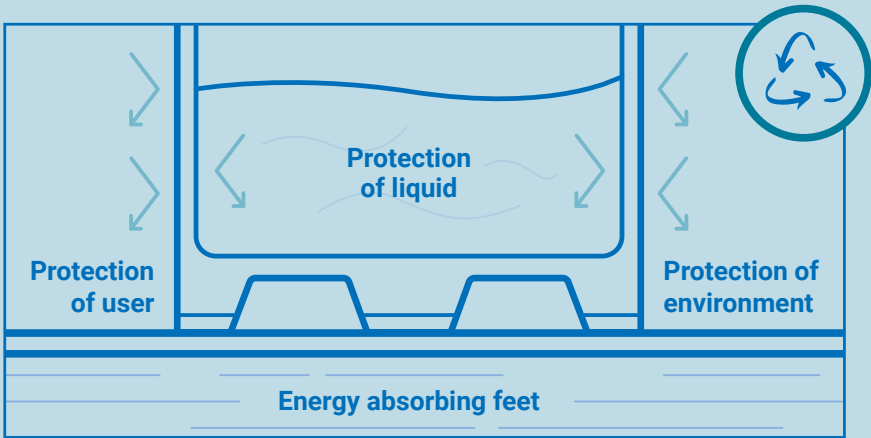



# POLY IBC UC 2.0

With our POLY IBC UC, we provide a high-quality, reusable container for hazardous liquid chemicals. Thanks to its ultra-clean inner surface, it is ideally suited for high-purity applications in the chemical, pharmaceutical, and semiconductor industries.



Ultra-low trace metals  
constantly < 100 ppt



UN & DOT certified –  
Packaging Group II (Y)



Secondary containment



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles (< 100 ppt)
- **Integrated secondary containment:** Enhanced safety through built-in protection
- **Unique traceability label:** Clear, reliable product identification
- **Environmental shielding:** Full protection from external influences
- **Certified for global transport:** UN/DOT approved, Packaging Group II (Y)
- **UV-resistant material:** Extended durability, even under harsh conditions
- **Fully enclosed system:** Maintains highest product integrity and purity
- **Multiway usage:** Reusable solution for sustainable logistics

## TECHNICAL DATA

SPECIFICATIONS	POLY IBC UC 2.0
Material inner container	HDPE, high purity
Material outer container	HDPE
Material cover	HDPE / HUVEX Cover optional
Material pallet	HDPE
Transport quantity	52 (Europe) or 60 (USA) per truck, 44 per Container
Bungs	3x 62x5 / 3x2" modified buttress
Standard color	Blue
Nominal capacity	1000 liter / approx. 264 gal.
Capacity	1050 liter / approx. 277 gal.
Width	1000mm / approx. 39.4 in.
Length	1200mm / approx. 47.2 in.
Height	1175mm +-2% / approx. 46.3 in. +-2%
Stacking height empty	Max 1+2
Stacking height full	1+1, max. 1900 kg / approx. 4188 lb
Weight	+/- 95kg / approx. 209 lb
Prepared for extractor tubes	Quick Connect, Entegris
Maximal filling temperature	40°C / 104°F
Approvals	
DOT certification	31HH1/Y/*/USA/+AA11220/0/2010
UN certification	31HH1/Y/.../D/BAM 6808-RIKUTEC/3314/2050
Standard liquid approvals	
Density kg/l	
Water	1.9
Wetting solution	1.5
Acetic acid	1.5
Nitric acid 55%	1.5
White spirit	1.4
n-Butylacetat	1.4
Original Tested Liquid Approval	Nitric Acid 70% UN2031
	Hydrofluoric Acid 60% UN1790

# POLY IBC UC-S 2.0

With our POLY IBC UC-S 1000, we provide a high-quality, reusable container for hazardous liquid chemicals. Thanks to its ultra-clean inner surface and UN approval, it is ideally suited for high-purity applications—especially for nitric acid up to 70%—in the chemical, pharmaceutical, and semiconductor industries.



-  **Ultra-low particle level – <100 ppt**
-  **UN & DOT certified – Packaging Group II (Y)**
-  **Secondary containment**
-  **Multiway Solution**

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles (< 100 ppt)
- **Unique traceability label:** Clear, reliable product identification
- **Environmental shielding:** Full protection from external influences
- **Certified for global transport:** UN approved, Packaging Group II (Y)
- **Nitric acid compatibility:** Safe handling of nitric acid concentrations up to 70%
- **Black cover:** For strong UV resistance

## TECHNICAL DATA

SPECIFICATIONS	POLY IBC UC-S 2.0
Material inner container	HDPE, high purity
Material outer container	HDPE
Material cover	HDPE
Material pallet	HDPE
Transport quantity	52 (Europe) & 60 (USA) per truck, 44 per Container
Bungs	3x 62x5 / 3x2" modified buttress
Standard color	Blue
Nominal capacity	1000 liter / approx. 264 gal.
Capacity	1050 Liter / approx. 277 gal.
Width	1000mm / approx. 39.4 in.
Length	1200mm / approx. 47.2 in.
Height	1175mm +-2% / approx. 46.3 in. +-2%
Stacking height empty	1+2
Stacking height full	1+1, max. 1900 kg / approx. 4188 lb
Weight	+/- 95 kg / approx. 209 lb
Prepared for extractor tubes	Quick Connect, Entegris
Maximal filling temperature	40°C / 104°F
Approvals	
UN certification	31HH1/Y/.../D/BAM 6808-RIKUTEC/3314/2070
Standard liquid approvals	Density kg/l
Water	1.9
Wetting solution	1.4
White spirit	1.4
Nitric acid 70%	1.5
White spirit	1.4

# POLY IBC CD 2.0

With our POLY IBC CD 2.0, we provide a high-quality, reusable container for flammable, high-purity liquid chemicals. Thanks to its UN and PTB approvals and ultra-clean inner surface, it is ideally suited for flammable high-purity applications in the chemical, pharmaceutical, and semiconductor industries.



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group II (Y)



Secondary containment



Elec. Conductive  
10<sup>6</sup> Ohm



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles (< 100 ppt)
- **Unique traceability label:** Clear, reliable product identification
- **Environmental shielding:** Full protection from external influences
- **Certified for global transport:** UN approved, Packaging Group II (Y)
- **Electrically conductive:** Surface resistance of 10<sup>6</sup> Ohm for safe handling of flammable liquids and solvents
- **Recyclable design:** Supports circular economy practices
- **Lower carbon footprint:** Reusable solution for sustainable logistic

## TECHNICAL DATA

SPECIFICATIONS	POLY IBC CD 2.0
Material inner container:	
outside layer	HDPE, carbon added
inside layer	HDPE, high purity
Material outer container	HDPE, carbon added
Material cover	HDPE, carbon added
Material pallet	HDPE, carbon added
Transport quantity	52 (Europe) or 60 (USA) per truck, 44 per Container
Bungs	1x 62x5 / 3x2" modified buttress 2x 42x2 closed
Standard color	Black
Nominal capacity	1000 liter / approx. 264 gal.
Capacity	1050 liter / approx. 277 gal.
Width	1000mm / approx. 39.4 in.
Length	1200mm / approx 47.2 in.
Height	1175mm +-2% / approx. 46.3 in. +-2%
Stacking height empty	None stackable
Stacking height full	None stackable
Weight	95 kg / approx. 209 lb
Prepared for extractor tubes	Quick Connect
Maximal filling temperature	40 °C / 104°F
Including dispense system	Dip tube DT-62CDP-XXX-1040-TF Dip tube DT-62CDP-020-0300-T
Approvals	
UN certification	31HH1/Y/.../D/BAM 6435-RIKUTEC/0/2070
Standard liquid approvals	Density kg/l
Water	1.9
Wetting solution	1.5
Acetic acid	1.5
n-butylacetate	1.5
Nitric acid 55%	1.4
White spirit	1.9



# RIKUTEC ULTRA CLEAN PACKAGING


# DRUMs

RIKUTEC Drums are premium multiway containers for high-purity liquids used in the semiconductor, chemical, pharmaceutical, and food industries.

Thanks to our patented multi-layer blow molding technology and the selective use of 100% high-purity, additive-free HDPE in all components that come into direct contact with the medium, our DRUMs offer comprehensive protection against external contamination and trace materials – ensuring maximum material integrity where it matters most.

Our feature 2 protective layers, while the Twin Drum 2.0 provides 3 layers and dual containment. All drums withstand up to 300 kPa internal pressure (CD-Drum: 150 kPa) and are certified for Packing Group I (X rating).

## MAXIMUM SAFETY WITH RIKUTEC-SOLUTIONS

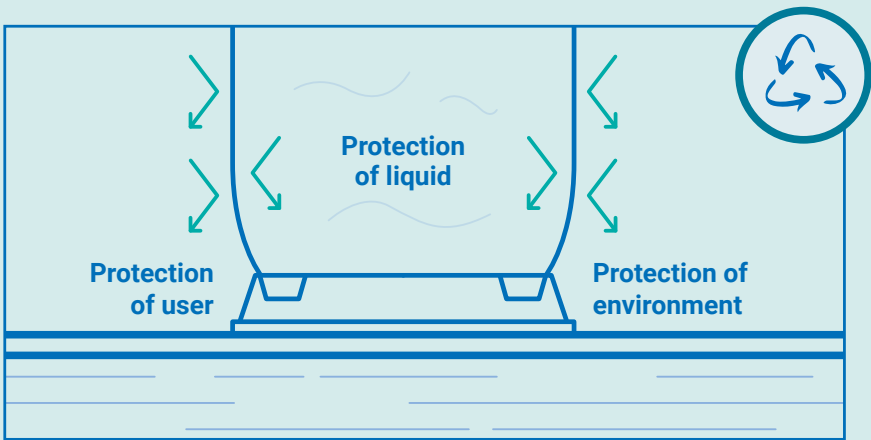

# UC ULTRA DRUM

The UC Ultra Drum combines cost-efficiency, high quality, and reusability with full UN certification – ideal for the safe handling of high-purity liquids in the chemical, pharmaceutical, and semiconductor industries.



Test pressure:  
200 kPa



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group II (Y)



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles in the inner liner (< 100 ppt)
- **UV-stabilized outer layer:** Blue color for easy identification and extended material durability
- **Clear traceability label:** Reliable product tracking and identification
- **UN certified (Packaging Group II / Y):** Safe for regulated hazardous materials
- **Test pressure: 200 kPa:** High structural integrity under pressure
- **Fully recyclable design:** Environmentally friendly and sustainable solution

## TECHNICAL DATA

SPECIFICATIONS	UC ULTRA DRUM
Material inner layer	HDPE
Material outer layer	HDPE
Transport quantity	192 (Europe) or 208 (USA) per truck (8 per Pallet) 208 per Container 40ft
Bungs	2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented)
Standard color	Blue
Nominal capacity	200 liter / approx. 53 gal.
Height	580 x 960mm / approx. 22.9 in. x 37.6 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 11,1 kg / approx. 24.4 pounds
Prepared for extractor tubes	Quick Connect
Approvals	
UN certification	1H1/Y1.9/200/.../D/BAM 15565 - RIKUTEC
Standard liquid approvals	
Density kg/L	
Water	Y1.9



# TWIN DRUM 2.0

With our TWIN DRUM 2.0, we provide a high-quality, reusable, double-walled drum for hazardous liquid chemicals. Thanks to its ultra-clean inner surface, it is ideally suited for high-purity applications in the chemical, pharmaceutical, and semiconductor industries.



Test pressure:  
320 kPa



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group I (X)



Secondary containment




Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles (< 100 ppt)
- **Unique traceability label:** Reliable and tamper-proof identification
- **Double-walled with secondary containment:** Maximum safety and leak protection
- **Comprehensive environmental protection:** Shields against external contamination
- **Double L-ring design:** Improved handling and stability
- **Space-saving & stackable:** Ideal for efficient storage and transport
- **Easy-to-clean inner surface:** Supports safe and residue-free refilling
- **UN certified:** Approved for Packaging Group I (X) and II (Y)
- **Test pressure:** 320 kPa: Robust and pressure-resistant
- **Specially engineered for Nitric Acid:** Material and design tailored for corrosive contents

## MAXIMUM SAFETY WITH RIKUTEC-SOLUTIONS

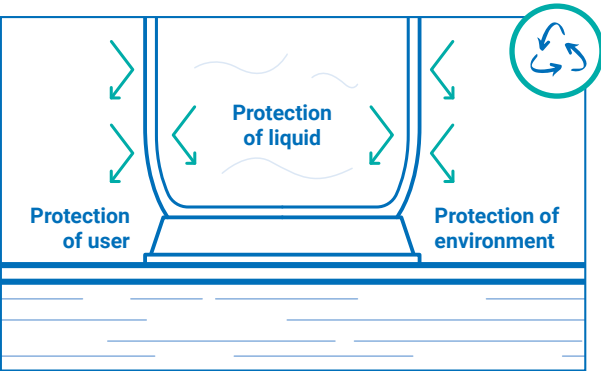

## TECHNICAL DATA

SPECIFICATIONS	TWIN DRUM 2.0
Material Inner layer of inside drum	HDPE without any stabilizers or additives
Material Outer layer of inside drum	HDPE
Material outer drum	HDPE
Transport quantity	192 (Europe) or 208 (USA) per truck (8 per Pallet) 200 per Container 40ft
Bungs	2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented)
Standard color	Blue
Nominal capacity	196 liter / approx. 53 gal.
Height	585 x 963mm / approx. 23 in. x 37,9 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 16 kg / approx. 35.3 lb
Prepared for extractor tubes	Quick Connect, Entegris
Approvals	
UN certification	6HH1/X1.9/280/..D/BAM 16329-RIKUTEC
DOT certification	6HH1 / X1.9 / 280 /** / USA / +AA9938
Standard liquid approvals	Density kg/L
Water	1.9
Wetting solution	1.2
Acetic acid	1.2
Nitric acid 55%	1.4
n-Butylacetat	1.2
Original Tested Liquid Approval	Nitric Acid Mix 65% UN2922 Nitric Acid 69% UN2031

# UC ULTIMATE DRUM

The UC ULTIMATE DRUM is a high-quality, reusable drum with UN certification. It is ideally suited for handling high-purity liquids in the chemical, pharmaceutical, and semiconductor industries.



Test pressure:  
300 kPa



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group I (X)



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles (< 100 ppt)
- **Unique traceability label:** Enables clear and reliable product tracking
- **Double L-ring design:** Ensures maximum stability and easy handling
- **High vapor pressure compatibility:** Ideal for sensitive and volatile contents
- **Optimized draining geometry:** Minimal product residue, maximum yield
- **UN certified (Packaging Group I / X):** Approved for hazardous goods with the highest requirements
- **300 kPa test pressure:** Proven robustness under extreme conditions
- **Fully recyclable:** Sustainable and environmentally responsible design

## TECHNICAL DATA

SPECIFICATIONS	UC ULTIMATE DRUM
Material inner layer	HDPE, high purity
Material outer layer	HDPE
Transport quantity	192 (Europe) or 208 (USA) per truck (8 per Pallet) 208 per Container 40ft
Bungs	2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented)
Standard color	Natural White
Nominal capacity	200 liter / approx. 53 gal.
Height	580 x 955 mm / approx. 22.9 in. x 37.6 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 14,5 kg / approx. 32 lbs
Prepared for extractor tubes	Quick Connect, Entegris
Optional	
X Approval	1H1/X1.2/300/.../BAM 6834-RIKUTEC
Approvals	
UN certification	1H1/Y1.9/300/.../D/BAM 6834-RIKUTEC
Standard liquid approvals	Density kg/l
Water	Y1.9 – X1.2
Wetting solution	1.2
Acetic acid	1.2
Nitric acid 55%	1.4
Original Tested Liquid Approval	Hydrofluoric Acid 60% UN1790



# CD DRUM

With our CD Drum, we provide a high-quality, reusable drum with hazardous goods approval for use in EX zones. Its electrically conductive design and ultra-clean inner surface make it ideal for flammable and high-purity applications in the chemical, pharmaceutical, and semi-conductor industries.



Test pressure:  
150 kPa



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group II (Y)



Elec. Conductive  
10<sup>6</sup> Ohm



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles in the inner liner (< 100 ppt)
- **Unique traceability label:** Clear, reliable product identification
- **Double L-ring design:** Enhanced stability and easy handling
- **High vapor pressure resistance:** Safe for volatile substances
- **Minimal product residue:** Optimized inner geometry for efficient emptying
- **Certified for global transport:** UN approved, Packaging Group II, 150 kPa pressure tested
- **Electrically conductive:** Surface resistance of 10<sup>6</sup> Ohm for safe handling of flammable liquids and solvents
- **Recyclable design:** Supports sustainability and material recovery

## TECHNICAL DATA

SPECIFICATIONS	CD DRUM
Material inner layer	HDPE
Material outer layer	HDPE, carbon added
Transport quantity	192 (Europe) or 208 (USA) per truck (8 per Pallet) 208 per Container 40ft
Bungs	2x S62 x 5mm / 2x2” modified buttress (1 vented and 1 non-vented)
Standard color	Carbon black
Nominal capacity	200 liter / approx. 53 gal.
Height	581 x 955mm / approx. 22.9 x 37.6 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 16,5 kg / approx. 35.3 lb.
Prepared for extractor tubes	Quick Connect System
Approvals	
UN certification	1H1/Y/150/D/BAM 7369 - RIKUTEC
Standard liquid approvals	
Density kg/l	
Water	1.2
Butyl acetat	1.2
White Spirit	1.2

# HEAVY DUTY DRUM

With our HEAVY DUTY DRUM, we provide a high-quality, reusable drum with UN approval – specifically designed for ammonia. Thanks to its ultra-clean inner surface and robust construction, it is ideally suited for high-purity liquid applications in the chemical, pharmaceutical, and semiconductor industries.



Test pressure:  
300 kPa



Ultra-low particle level –  
<100 ppt



UN & DOT certified –  
Packaging Group II (Y)



Multiway Solution

## KEY BENEFITS

- **Semiconductor-grade purity:** Ultra-low trace metals and particles in the inner liner (< 100 ppt)
- **Unique traceability label:** Clear, reliable product identification
- **Double L-ring design:** Enhanced stability and easier handling
- **High vapor pressure resistance:** Safe storage of volatile media
- **Minimal product residue:** Optimized for efficient emptying
- **Certified for global transport:** UN approved, Packaging Group II, 300 kPa pressure tested
- **Ammonia-optimized version:** Heavy-duty design specifically developed for ammonia handling
- **Recyclable construction:** Sustainable and reusable solution

## TECHNICAL DATA

SPECIFICATIONS	HEAVY DUTY DRUM
Material inner layer	HDPE
Material outer layer	HDPE
Transport quantity	192 (Europe) or 208 (USA) per truck (8 per Pallet) 208 per Container 40ft
Bungs	2x S62 x 5mm / 2x2" modified buttress (1 vented and 1 non-vented)
Standard color	Natural White
Nominal capacity	200 liter / approx. 53 gal.
Height	581 x 955mm / approx. 22.9 in. x approx. 37.6 in.
Pallet stacking (empty)	Max. 3 pallets high
Pallet stacking (full)	2 pallets high
Weight	+/- 16kg / approx. 35.3 lbs
Prepared for extractor tubes	Quick Connect, Entegris
Approvals	
UN certification	1H1/Y1.2/300/.../D/BAM 6943 - RIKUTEC
Standard liquid approvals	
Density kg/l	
Water	1.2



# RIKUTEC QUICK CONNECT SYSTEM

Based on decades of application experience, the Quick Connect systems used by RIKUTEC are considered among the leading technical solutions for the safe and contamination-free transfer of liquid chemicals. These high-precision connectors, manufactured from ultra-pure, metal-free polymers, are specifically designed for compatibility with a wide range of aggressive and flammable substances, including acids, bases, and solvents.

The system ensures safe and contamination-free extraction from drums and IBCs, while simultaneously allowing controlled venting. Each unit features a dedicated dip tube and a dual-port dispensing head for both media and air, enabling a closed-loop process that protects users and the environment.

With its modular design and intelligent keying options, the RIKUTEC Quick Connect System offers clean, safe, and flexible chemical handling across a wide range of industries.

## FAST. RELIABLE. AVAILABLE WORLDWIDE.

**Quick Availability:** Standard versions of dip tubes, closures, seals, and tamper-evident components are ready for pickup or shipment **within 48 hours** from our production site in Germany.

All key components are manufactured in Germany and finalized at regional hubs in **Anderson (USA) and Seoul & Singapore (Asia)**. From these strategic locations, we ensure rapid availability and short delivery times to our customers worldwide.

Our international logistics network guarantees efficient supply to major markets, among others:


**USA:** Anderson (with local final assembly and warehousing), servicing Austin (TX), Phoenix (AZ), Dallas, Seattle, San Jose (CA), Santa Clara (CA)

**Asia:** Seoul & Singapore (regional hubs), serving Tokyo (JP), Taipei (TW), Dalian (CN)

**Europe:** Catania (IT), Dublin (IR), Dresden (DE), Villach (AT)

# RIKUTEC DIP TUBE

RIKUTEC Dip Tubes are the suitable choice for your dispensing and filling needs. Each dip tube is molded from high-purity polymers, which makes it capable for handling liquids in the chemical, pharmaceutical and semiconductor industries. With the RIKUTEC dip tube, chemical dispensing or filling becomes a streamlined and efficient process, improving workplace safety and productivity.

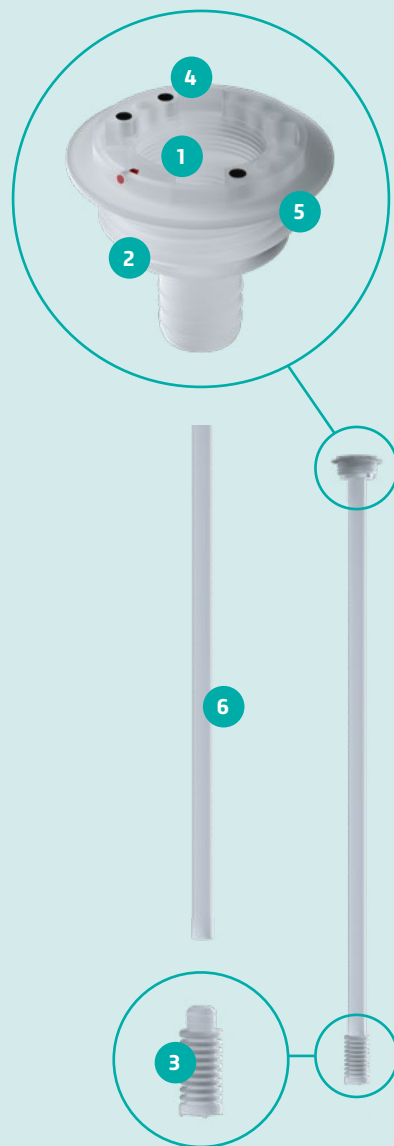

- 1 **Different Closures**  
to Prevent Leaks (Vented Closures Available)
- 2 **Different Bung Sizes**  
and Threading Available
- 3 **Optional Bellow**  
for RCRA Empty on all Containers
- 4 **Error-Proof Coding System**
- 5 **POE and PE Gaskets**  
for Sealing and Compatibility
- 6 **Lengths**  
Available up to 1200+ mm

## DIP TUBE HIGHLIGHTS



UN and DOT Tested  
and Approved



Suitable for a Wide  
Array of Packaging



Conductive Version  
Available



**IBC UC 2.0**  
with RIKUTEC  
Dip Tube

## ORDER SPECIFICATION RIKUTEC DIP TUBE

### STANDARD VERSION

Threading	Specification
S56 x 4	DT- <b>56</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>D</b>
S62 x 5	DT- <b>62</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>D</b>
S62 x 5	DT- <b>62R</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>D</b>
S70 x 6	DT- <b>70</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>D</b>

### WITH BELLOW

Threading	Specification
S56 x 4	DT- <b>56</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>F</b>
S62 x 5	DT- <b>62</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>F</b>
S62 x 5	DT- <b>62R</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>F</b>
S70 x 6	DT- <b>70</b> <b>XX</b> - <b>XXX</b> -XXXX - <b>X</b> <b>F</b>


### DT-XXXX-XXX-XXXX-XX

<b>XX</b>	<b>Bung Size</b> (S56x4, S62x5, S70x6)
<b>XX</b>	<b>Material</b> (PP, PE)
<b>XXX</b>	<b>Chemical Code</b> Code according to the "Chemical coding" table, e.g. <b>000</b> for unencoded
<b>XXXX</b>	<b>Length</b> Recirculation <b>0000</b>
<b>X</b>	<b>Closure</b> ( <b>T</b> =42x2, <b>W</b> =42x2 vented, <b>S</b> =3/4")
<b>X</b>	<b>Options</b> ( <b>D</b> =Standard Dip Tube, <b>F</b> =Bottom Bellow, <b>O</b> =Recirculation)




# RIKUTEC DISPENSE AND RECIRCULATION HEAD

RIKUTEC Dispense and Recirculation Heads are a vital component for accurate and precise dispensing and filling of high-purity chemicals. They provide a secure and leak-proof connection, offer a variety of flow rates, and can be customized to suit specific chemical dispensing and filling needs. With the RIKUTEC dispense or recirculation head, chemical dispensing or filling becomes a streamlined and efficient process, improving workplace safety and productivity.

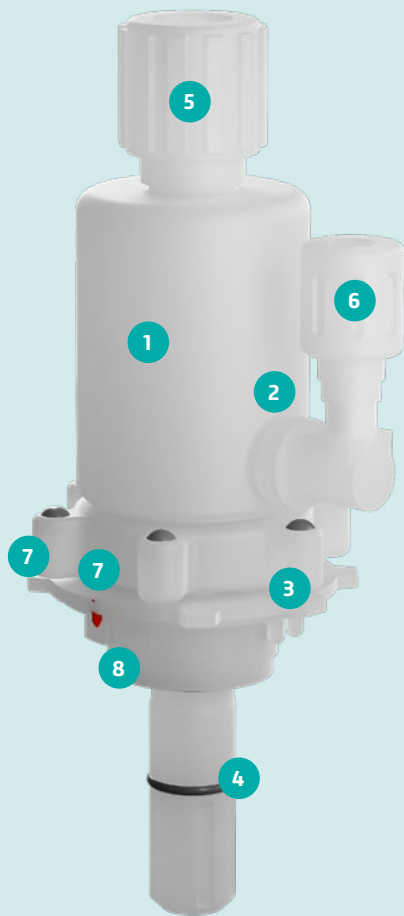


- 1 **Built-in Check Valve**  
to Control Backflow into Container
- 2 **Made from High-Purity Resin**  
in Cleanroom Environment
- 3 **Key-Coding System**  
for Cross-Contamination Control
- 4 **Gaskets for Chemical Compatibility**  
(Kalrez, Viton, EPDM)
- 5 **Fluid Connector**  
in different sizes
- 6 **Simultaneous Venting**  
in different sizes
- 7 **PEEK Threading**  
for Durability
- 8 **Molded for any Bung Size and Thread**


## BENEFITS




Integrated Safety System




Chemical Purity with Low Trace Material



Error-Proof Coding System Enabled



Easy to Install and Operate



Sizable for Most Containers

## ORDER SPECIFICATION RIKUTEC DISPENSE AND RECIRCULATION HEAD

DH-XX-XX-XXX-XXX/X-XXX/X

DH	DH = Dispense Head
X	Function D = Dispense R = Recirculation
X	Gasket K = DuPont Kalrez®, Compound 6375 Q = FKM F = FKM E = EPDM
XX	Material (PE, CD, PVDF)
XXX	Chemical Code: (according to the RIKUTEC Quick Connect System 2 chemical coding table)
X	H = Fluid connection horizontal V = Fluid connection vertical
XX/X	Fluid connection: F1/4 = 1/4" Flare F3/8 = 3/8" Flare F1/2 = 1/2" Flare F3/4 = 3/4" Flare F1/1 = 1" Flare
X	H = Horizontal ventilation connection V = Ventilation connection vertical
XX/X	Ventilation connection: F1/4 = 1/4" Flare F3/8 = 3/8" Flare F1/2 = 1/2" Flare

# SPECIALIZED IN ULTRA-CLEAN PACKAGING SOLUTIONS FOR HIGH-PURITY CHEMICALS AND SENSITIVE APPLICATIONS

## RIKUTEC GERMANY

Graf-Zeppelin-Straße 1-5  
57610 Altenkirchen | Germany

T +49 2681 9546 0  
info@rikutec.de | www.rikutec.de

## RIKUTEC AMERICA

2510-B W. Whitner St.  
Anderson, SC 29624 | USA

T +1 508 234 7300  
info@rikutec.com | www.rikutec.com

## RIKUTEC ASIA

Tower B-415, GwaCheon SangSang Jai,  
456 Galhyeon-dong, Gwacheon-si,  
13840 Gyeonggi-do | Republic of Korea

T +82 2 797 0701  
info@rikutec.asia | www.rikutec.asia